
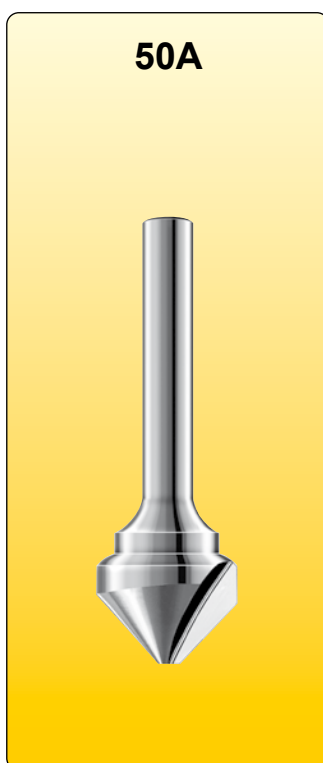


Svasatori 90° a tagliente singolo 90° single flute countersink

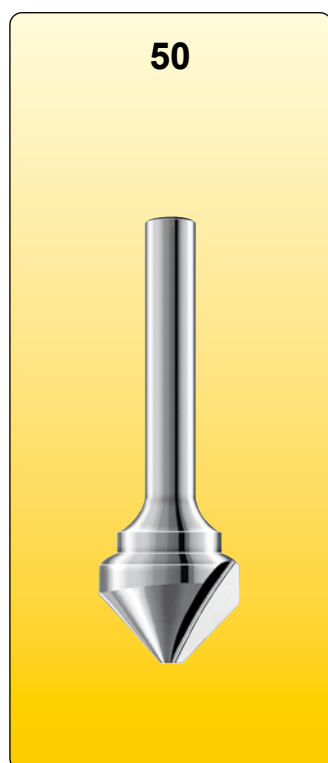

Settori d'impiego / Range of application

A: Leghe Leggere / Light alloys

A1.1-1.6 A2.1-2.7 A3.1-3.2 A4.1-4.2

B: Plastiche - Plastiche rinforzate con fibre

B: Plastics - Reinforced plastic fibres

B1.1-1.3 B1.5-1.6 B2.1-2.4

C: Acciai / Steels



C1.1-1.8 C2.1-2.3 C3.1 C4.1

D: Acciaio inossidabile / Stainless steel

D1.1-1.4

F: Ghise / Cast irons

F1.4-1.5 F2.1-2.4

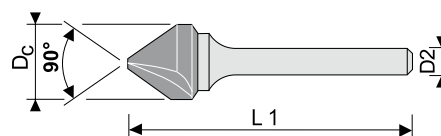

05

D _c	L1	D2 h6	50	50A
				Rivestite / Coated
4,3	50	6	50.0406	50.0406A
6,3	51	6	50.0606	50.0606A
8,3	52	6	50.0806	50.0806A
10,4	53	6	50.1006	50.1006A
12,4	55	6	50.1206	50.1206A
12,4	55	8	50.1208	50.1208A
16,5	58	6	50.1606	50.1606A
16,5	58	8	50.1608	50.1608A
16,5	58	10	50.1610	50.1610A
20,5	61	6	50.2006	50.2006A
20,5	61	8	50.2008	50.2008A
20,5	61	10	50.2010	50.2010A
25,5	64	8	50.2508	50.2508A
25,5	64	10	50.2510	50.2510A
31,5	68	10	50.3110	50.3110A