

Svasatori 60° a tagliente singolo 60° single flute countersink

51



51A



Settori d'impiego / Range of application

A: Leghe Leggere / Light alloys

A1.1-1.6 A2.1-2.7 A3.1-3.2 A4.1-4.2

B: Plastiche - Plastiche rinforzate con fibre

B: Plastics - Reinforced plastic fibres

B1.1-1.3 B1.5-1.6 B2.1-2.4

Acciai / Steels


C1.1-1.8 C2.1-2.3 C3.1 C4.1

D: Acciaio inossidabile / Stainless steel

D1.1-1.4

F: Ghise / Cast irons

F1.4-1.5 F2.1-2.4

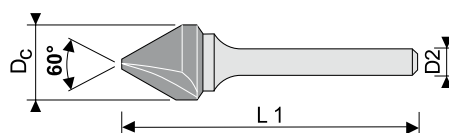

HM
CK10-20-MG
Micrograin

WN



05

D _c	L1	D2 h6	51	51A
				Rivestite / Coated
4,3	50	6	51.0406	51.0406A
6,3	51	6	51.0606	51.0606A
8,3	55	6	51.0806	51.0806A
10,4	56	6	51.1006	51.1006A
12,4	59	6	51.1206	51.1206A
12,4	59	8	51.1208	51.1208A
16,5	63	6	51.1606	51.1606A
16,5	63	8	51.1608	51.1608A
16,5	63	10	51.1610	51.1610A
20,5	67	6	51.2006	51.2006A
20,5	67	8	51.2008	51.2008A
20,5	67	10	51.2010	51.2010A
25,5	73	8	51.2508	51.2508A
25,5	73	10	51.2510	51.2510A
31,5	79	10	51.3110	51.3110A