

Svasatori 90° a 3 taglienti 90° three flute countersink

52



52A



Settori d'impiego / Range of application

A: Leghe Leggere / *Light alloys*

A1.1-1.6 A2.1-2.7 A3.1-3.2 A4.1-4.2

B: Plastiche - Plastiche rinforzate con fibre

B: *Plastics - Reinforced plastic fibres*

B1.1-1.3 B1.5-1.6 B2.1-2.4

C: Acciai / *Steels*


C1.1-1.8 C2.1-2.3 C3.1 C4.1

D: Acciaio inossidabile / *Stainless steel*

D1.1-1.4


F: Ghise / *Cast irons*

F1.4-1.5 F2.1-2.4

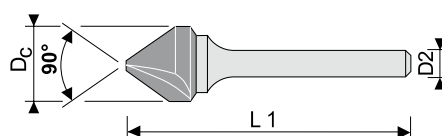

HM
CK10-20-MG
Micrograin

WN



D _c	L1	D2 h6	52	52A
				Rivestite / Coated
4,3	50	6	52.0406	52.0406A
6,3	51	6	52.0606	52.0606A
8,3	52	6	52.0806	52.0806A
10,4	53	6	52.1006	52.1006A
12,4	55	6	52.1206	52.1206A
12,4	55	8	52.1208	52.1208A
16,5	58	6	52.1606	52.1606A
16,5	58	8	52.1608	52.1608A
16,5	58	10	52.1610	52.1610A
20,5	61	6	52.2006	52.2006A
20,5	61	8	52.2008	52.2008A
20,5	61	10	52.2010	52.2010A
25,5	64	8	52.2508	52.2508A
25,5	64	10	52.2510	52.2510A
31,5	68	10	52.3110	52.3110A