

Svasatori 60° a 3 taglienti 60° three flute countersink

53



53A



Settori d'impiego / Range of application

A: Legierungen / Light alloys

A1.1-1.6 A2.1-2.7 A3.1-3.2 A4.1-4.2

B: Plastiche - Plastiche rinforzate con fibre

B: Plastics - Reinforced plastic fibres

B1.1-1.3 B1.5-1.6 B2.1-2.4

C: Acciai / Steels


C1.1-1.8 C2.1-2.3 C3.1 C4.1

D: Acciaio inossidabile / Stainless steel

D1.1-1.4



F: Ghise / Cast irons

F1.4-1.5 F2.1-2.4

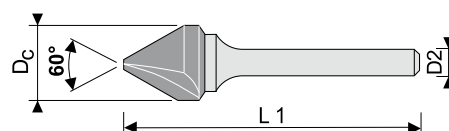

HM
CK10-20-MG
Micrograin

WN



D _c	L1	D2 h6	53	53A
				Rivestite / Coated
4,3	50	6	53.0406	53.0406A
6,3	51	6	53.0606	53.0606A
8,3	55	6	53.0806	53.0806A
10,4	56	6	53.1006	53.1006A
12,4	59	6	53.1206	53.1206A
12,4	59	8	53.1208	53.1208A
16,5	63	6	53.1606	53.1606A
16,5	63	8	53.1608	53.1608A
16,5	63	10	53.1610	53.1610A
20,5	67	6	53.2006	53.2006A
20,5	67	8	53.2008	53.2008A
20,5	67	10	53.2010	53.2010A
25,5	73	8	53.2508	53.2508A
25,5	73	10	53.2510	53.2510A
31,5	79	10	53.3110	53.3110A

05