

Alesatori a tagliente diritto - tipo A

Tipo di metallo duro K10 - micrograna - tolleranza H7 - DIN 8093 (212) - divisione irregolare

Straight flute reamers - Type «A»

Tolerance H7 - K10 - Micrograin carbide - DIN 8093 (212) - Uneven indexing

131



Settori d'impiego / Range of application

A: Leghe Leggere / Light alloys

A1.1-1.7 A2.1-2.7 A3.1-3.2 A4.1-4.2

C: Acciai / Steels

C1.1-1.8 C2.1-2.4 C3.1 C4.1-4.2

D: Acciai inossidabili / Stainless Steel



D1.1-1.5

E: Titanio / Titanium

E1.1-1.3 E2.2

F: Ghise / Cast irons

F1.1-1.5 F2.1-2.4

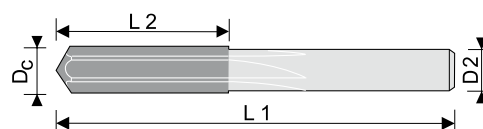

4.
01

D _c H7	L2	L1	D2 h6	Z	131
					■
2	11	49	2	4	131.020
2,5	14	57	2,5	4	131.025
3	15	61	3	4	131.030
3,5	18	70	3,5	4	131.035
4	19	75	4	4	131.040
4,5	21	75	4,5	4	131.045
5	23	86	5	4	131.050
5,5	26	93	5,6	6	131.056
6	26	93	5,6	6	131.056
6,5	28	101	6,3	6	131.063
7	31	109	7,1	6	131.071
8	33	117	8	6	131.080
9	36	125	9	6	131.090
10	38	133	10	6	131.100
11	41	142	10	6	131.110
12	44	151	10	6	131.120

■ Rivestimento su richiesta

■ Coating upon request.